



# CATALOGUE FOR SUPER CLEAR PVC FILM

ECO-FRIENDLY MATERIAL, REACH CERTIFIED

[WWW.CONETPLASTIC.COM](http://WWW.CONETPLASTIC.COM)

COMMITTED TO HELPING YOU FULFILL YOUR CUSTOMERS'  
HIGH QUALITY PVC FILM NEEDS

# ABOUT US



Our company are committed to produce REACH certified flexible PVC Strip Curtains, PVC film, etc. ISO9001:2015 manufacturer since 2006, follow the international standards, advanced production equipment, highly qualified skilled workers and high-quality raw materials ensure the high quality of the products. Now the quality of our products have reached the same level as the world's major manufacturers in Europe, US, Japan.



**Annual production capability** - 5000 tons, 11 set production line

**Punctual Lead Time** - For a 20ft container, we can make it finished within 15 work days.

**Workers & engineers** - More than 200 workers and 20 engineers.



# SUPER CLEAR PVC FILM

Wide width soft boards, a high-quality PVC material, clear, transparent and more than ten colors, with smooth surface and uniform color, free from cracks or bubbles. It features high withstand capacity to heat and coldness, high resistance to strong acids and alkali, hard pressure, impact, stretch, aging and has good anti-static property, high transparency and life service life.

**Main applications:** window material, marine and camping industry, etc.









# SPECIFICATIONS

- **Color selection:** Clear light blue, Transparent
- **Transparency:** Super clear
- **Temperature range:** -10°C to 50°C and -30°C to 50°C
- **Thickness range:** 0.12mm to 8mm
- **Maximum width:** 2600mm
- **Types:** Super Clear PVC Film, FR Super Clear PVC films, Anti-static Super Clear PVC Film, Low temperature Super Clear PVC film, UV1000 and UV3000 Super Clear PVC Film
- **Certification:** REACH, UV1000 and UV3000 Hours, RoHs, FR - DIN4102-1 GLASS B2 and B1





# APPLICATION SCENE

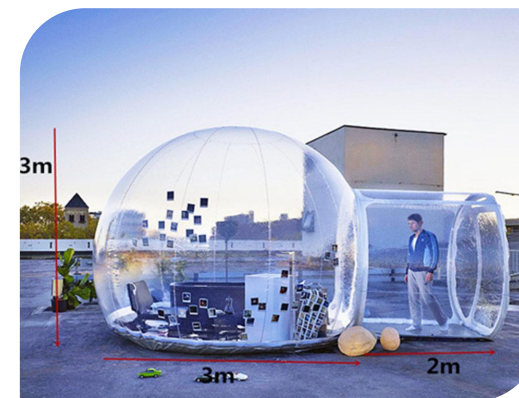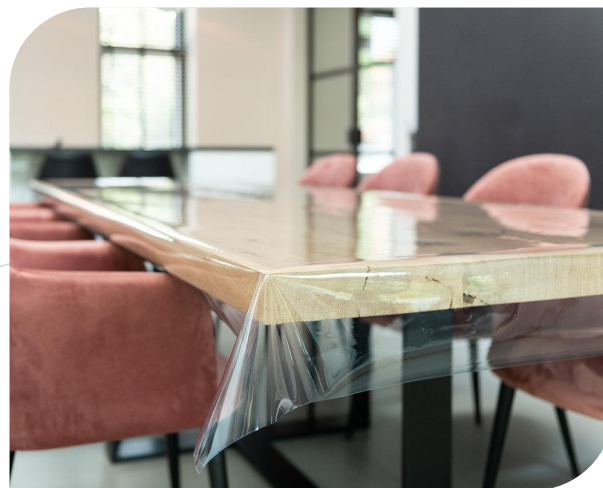





# PRINTED PVC FILM



## Size:

- **Thickness :** 0.15mm--1mm
- **Maximum Width :** 1.8m
- **Square Size :** 25cm x 25cm  
**Line width:** 1cm

## Application





# ESD PVC FILM



## TECHNICAL DATA

- **Thickness:** 0.15 mm to 1.0 mm
- **Max width:** 1800 mm
- **PHR:** 25 to 65 PHR
- **Color:** clear, yellow, black, frosting
- **ESD :**  $10^6 \Omega$  (positive)  
 $10^9 \Omega$  (negative)



## Application







## PVC COATED CANVAS TARPAULIN

- **Color selection:** White, Brown, Blue, Yellow, Green...
- **Temperature range:** -30°C to 50°C
- **Thickness range:** 0.3mm to 2mm
- **Maximum width:** 3200mm
- **Polyester mesh fabric:** 200D\*500D 18\*12,  
500D\*500D 18\*17/16, 840D 18,  
1000D 14/18/20/23/26/28/30...
- **Tear Strength:** 20N
- **Certification:** REACH, UV treated, FR treated, Waterproof





# PACKAGE

CHOOSE THE PACKAGE YOU LIKE







# THANK YOU



## QINGDAO CONET INDUSTRY



Add.: B-813 No 6. CuiLing Road, Laoshan District, 266061  
Qingdao, China.



Tel.: (+0086 - 532) 6806 5015

Fax: (+0086 - 532) 6806 5025

[www.conetplastic.com](http://www.conetplastic.com)

